

# Elevated Temperature Batt 1000° & HD Blanket 1000° with ECOSE® Technology

Submittal Date \_\_\_\_\_

**KNAUF INSULATION**  
it's time to save energy

## Description

Knauf Insulation Elevated Temperature Batt 1000° and Knauf Insulation Elevated Temperature HD Blanket 1000° with ECOSE® Technology are semi-rigid thermal insulations (1.6 pcf, 25.6 kg/m<sup>3</sup>) bonded with ECOSE® Technology.

## ECOSE® Technology

ECOSE® Technology is a revolutionary new binder chemistry that makes Knauf Insulation products even more sustainable than ever. It features rapidly renewable bio-based materials rather than non-renewable petroleum-based chemicals traditionally used in glass mineral wool insulation products. ECOSE® Technology reduces binder embodied energy and does not contain phenol, formaldehyde, acrylics or artificial colors.

## Application

Knauf Insulation Elevated Temperature Batt 1000° and Knauf Insulation Elevated Temperature HD Blanket 1000° with ECOSE® Technology are used in high-temperature marine applications, industrial furnaces, boilers, vessels and industrial ovens, where lighter-weight insulation is needed or flexible and/or semi-rigid high-temperature insulations are needed for irregular surfaces.

## Features and Benefits

### Excellent Thermal Properties

- Low thermal conductivity
- Increase system efficiency and decrease fuel usage

### Low-Cost Installations

- Lightweight and easy to handle and fabricate
- Flexibility makes them ideal for flat or irregular surfaces

### Damage Resistant

- More resistant to abuse than standard Elevated Temperature blankets
- Tough and resilient
- Resist damage in shipment and during and after installation

### Custom Sizes

- All items are available in made-to-order sizes.

### Indoor Air Quality Excellence

- The UL GREENGUARD Certification Program (formerly known as GREENGUARD Indoor Air Quality Certification) gives assurance that products designed for use in indoor spaces meet strict chemical emissions limits, which contribute to the creation of healthier interiors. Achieving UL GREENGUARD Certification gives credence to manufacturers' sustainability claims, backing them with empirical scientific data from an unbiased, third-party organization.

### Sustainability

- Carbon-negative: meaning Knauf Insulation products used for thermal insulating purposes recover the energy that it took to make them in just hours or a few days, depending on the application. Once installed, the product continues to save energy and reduce carbon generation as long as it is in place.
- Glass mineral wool insulation with ECOSE® Technology contains three primary ingredients:
- Sand, one of the world's most abundant and renewable resources
- A minimum of 50% recycled post-consumer glass content and UL Environment verification every 6 months
- ECOSE® Technology which reduces binder embodied energy by up to 70% and total product embodied energy by up to 4%.

## Specification Compliance in U.S.:

- UL/ULC Classified
- MIL-I-24244C
- NRC Reg. Guide 1.36. (Certification needs to be specified at time of order)
- HH-I-558C; Form B, Type I, Class 7, 8
- USCG 164/109/18/1
- ASTM C 1139 Type I Grade 3, Type 2 Grade 3
- Conforms to Marine Equipment European 1408/13

## In Canada:

- CAN/ULC S102-M88
- CGSB 51-GP-11M

## Product Features

- UL/ULC Classified
- UL GREENGUARD Certified®
- UL GREENGUARD GOLD<sup>SM</sup> and validated formaldehyde free
- Complies with Oregon Revised Statue 453.085 and contains less than 0.10% decabromdiphenyl ether (DecaBDE) by mass
- Tested and certified to meet all requirements of EUCEB

## Technical Data

### Surface Burning Characteristics

- Does not exceed 25 Flame Spread, 50 Smoke Developed when tested in accordance with UL 723, ASTM E 84, CAN/ULC S103-M88, NFPA 90A and 90B and NFPA 255.

### Water Vapor Sorption (ASTM C 1104)

- 0.1% or less by volume.

### Temperature Limit (ASTM C 411)

- Up to 1000°F (538°C) at a maximum recommended thickness of 6".

### Resists Microbial Growth (ASTM C 1338)

- Does not promote or support the growth of mold, fungi or bacteria.

### Corrosiveness (ASTM C 665)

- Does not accelerate corrosion on aluminum, steel or copper.

### Corrosion (ASTM C 1617)

- The corrosion rate in mills/yr will not exceed that of the 1 ppm chloride solution.

## Application and Specification Guidelines

### Precautions

- During initial heat-up to operating temperatures above 350°F (177°C), a slight odor and somesmoke may be given off as a portion of the bonding material used in the insulation begins to undergo a controlled decomposition.
- If natural convection is not adequate in confined areas, forced ventilation should be provided in order to protect against any harmful fumes and vapors that might be generated.

### Storage

- Protect material from water damage or other abuse. Protect from welding sparks and open flame. The material may be stored outside if the packaging is not damaged.

## Preparation

- Apply the product on clean, dry surfaces.

## Application

- There is no heat-up cycle required for Knauf Insulation Elevated Temperature Batt 1000° and Knauf Insulation Elevated Temperature HD Blanket 1000°.
- The product should be secured with welded pins or studs and covered with sheet metal. An alternate method entails covering the insulation with a metal mesh and insulating cement, canvassing and painting.
- Pins and studs shall be located a maximum of 4" (102 mm) from each edge and spaced no greater than 16" (406 mm) on center.
- Care should be taken to avoid over compressing the insulation with the retaining washer.
- For application of Knauf Insulation Elevated Temperature Batt 1000° and Knauf Insulation Elevated Temperature HD Blanket 1000° over 500°F (260°C), double layer application is recommended with staggered joints.
- When using the products at 1000°F (538°C), it is recommended that no more than 6" (152 mm) thickness should be used. For thicknesses in excess of 6", contact your Knauf Insulation sales representative.

## Caution

Glass mineral wool may cause temporary skin irritation. Wear long-sleeved, loose-fitting clothing, head covering, gloves and eye protection when handling and applying material. Wash with soap and warm water after handling. Wash work clothes separately and rinse washer. A disposable mask designed for nuisance type dusts should be used where sensitivity to dust and airborne particles may cause irritation to the nose or throat.

## Glass Mineral Wool and Mold

Glass mineral wool insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated. Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced.

## Notes

The chemical and physical properties of Knauf Insulation Elevated Temperature Batt 1000° and Knauf Insulation Elevated Temperature HD Blanket 1000° with ECOSE® Technology represent typical average values determined in accordance with accepted test methods. The data is subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

Check with your Knauf Insulation sales representative to assure information is current.


with **ECOSE®**  
TECHNOLOGY

# Elevated Temperature Batt 1000° & HD Blanket 1000° with ECOSE® Technology

Submittal Date \_\_\_\_\_



## Thermal Efficiency (ASTM C 177)

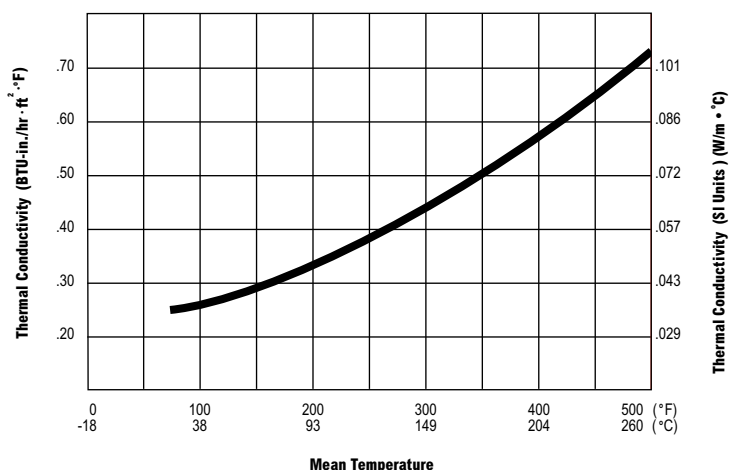

Mean Temperature	k	k(SI)
100°F (38°C)	.24	.035
200°F (93°C)	.33	.048
300°F (149°C)	.44	.063
400°F (204°C)	.57	.082
500°F (260°C)	.72	.104

## ET Batt 1000° Forms Available

Thickness	Width	Length
1½" (38 mm)	24" (610 mm)	48" (1219 mm)
2" (51 mm)		
2½" (64 mm)		
3" (76 mm)		
3½" (89 mm)		
4" (102 mm)		

## HD Blanket 1000° Forms Available

Thickness	Width	Length
1½" (38 mm)	48" (1219 mm)	120' (36.6 m)
2" (51 mm)		80' (24.4 m)
2½" (64 mm)		70' (21.3 m)
3" (76 mm)		60' (18.3 m)
3½" (89 mm)		50' (15.2 m)
4" (102 mm)		40' (12.2 m)