


AMIS 200-DB CAL SIL PIPE SUPPORT SYSTEM

FEATURES:

- * BOTTOM SHIELD IS "DOUBLED-UP" TO PROVIDE EXTRA SUPPORT FOR MODERATE LOAD REQUIREMENTS
- * 360 DEGREES GALVANIZED CARBON STEEL SADDLE
- * CALCIUM SILICATE PIPE INSULATION

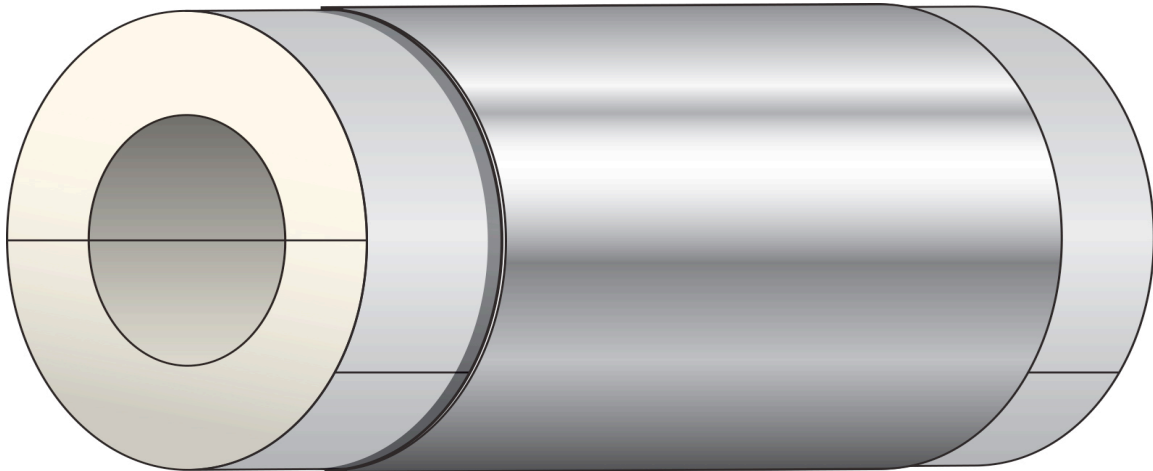

APPLICATION:

AMIS 200 Calsil is designed for use on medium and high temperature piping systems or for cold applications when a vapor barrier is applied. High temperature applications include heat transfer systems for hot water, fuel oil, steam condensate, super heated steam, petroleum and process piping and generator exhaust. Cold temperature applications include cold water systems, chilled water systems, and rain water conductors. Manufactured for installation on flat surfaces, clevis and roller support systems to meet **moderate load** requirements.



38900 W. TEN MILE RD. • FARMINGTON HILLS, MI 48335
 ph: 248-478-7644 • fx: 248-478-6195 • toll free: 800-859-7875
 sales@americaninsulation.com • www.americaninsulation.com

MODEL - AMIS 200-DB CAL SIL
PRE-INSULATED PIPE SUPPORT SYSTEM
WITH HIGH STRENGTH/HIGH TEMPERATURE PIPE INSULATION

FEATURES:

- NO MINIMUM ORDER REQUIREMENTS
- NEVER OVER PURCHASE AGAIN
- EASY RETURNS

COST SAVINGS

- NO DELIVERY CHARGES
- COST COMPETITIVE

QUALITY

- HIGH TEMPERATURE APPLICATIONS
- REDUCES NOISE & VIBRATION
- EASY INSTALLATION
- 360 METAL SHIELD
- CARBON STEEL SHIELD
- EXTENDED INSULATION
- AVAILABLE WITH VAPOR BARRIER FOR COLD OR CHILLED WATER APPLICATIONS

- NON-ASBESTOS CAL-SIL
- NON-COMBUSTIBLE
- FLARED METAL SHIELDS
- LIGHT WEIGHT
- INDIVIDUALLY LABELED
- AVAILABLE WITH STRUCTURAL INSERT

DELIVERY

- NEXT DAY DELIVERY OF STOCK SIZES
- **SAVE TIME & \$\$\$\$\$**
- ORDER AS NEEDED
- PACKAGED AND TAGGED FOR SPECIFIC JOBSITE AREA
- NEVER WAIT AGAIN
- FREE DELIVERY

APPLICATION:

AMIS 200 CALSIL IS DESIGNED FOR USE ON MEDIUM AND HIGH TEMPERATURE PIPING SYSTEMS OR FOR COLD APPLICATIONS WHEN A VAPOR BARRIER IS APPLIED. HIGH TEMPERATURE APPLICATIONS INCLUDE HEAT TRANSFER SYSTEMS FOR HOT WATER, FUEL OIL, STEAM CONDENSATE, SUPER HEATED STEAM, PETROLEUM AND PROCESS PIPING AND GENERATOR EXHAUST. COLD TEMPERATURE APPLICATIONS INCLUDE COLD WATER SYSTEMS, CHILLED WATER SYSTEMS, AND RAIN WATER CONDUCTORS. MANUFACTURED FOR INSTALLATION ON FLAT SURFACES, CLEVIS, AND ROLLER SUPPORT SYSTEMS TO MEET **MODERATE LOAD** REQUIREMENTS.

MATERIAL DATA:

<i>TEMPERATURE RANGE</i>	+100F TO 1200F (+40F TO 1200F W/VAPOR BARRIER)	
<i>SHIELD PROPERTIES</i>	GALVANIZED CARBON STEEL	ASTM A 527
<i>DENSITY</i>	14 pcf	ASTM C 302
<i>COMBUSTIBILITY</i>	NON-COMBUSTIBLE	ASTM E 136
<i>WATER-REPELLENT</i>	PASSES	ASTM C 533, TYPE I
<i>COMPRESSIVE STRENGTH</i>	100psi	ASTM C 165
<i>CAL-SIL SURFACE BURNING CHARACTERISTICS</i>	FLAME SPREAD 0	ASTM E 84
	SMOKE DEVELOPMENT 0	
<i>THERMAL CONDUCTIVITY</i>	Mn TEMP=100F 0.31 BTU-in/hr-SF-F	ASTM C 335
	Mn TEMP=200F 0.36 BTU-in/hr-SF-F	
	Mn TEMP=400F 0.41 BTU-in/hr-SF-F	
	Mn TEMP=600F 0.49 BTU-in/hr-SF-F	