

DATA SHEET

Atmosphere™ Rigid Plenum Liner

with ECOSE® Technology



DESCRIPTION

Atmosphere™ Rigid Plenum Liner is a heavy-density mat-faced fiberglass board insulation bonded with ECOSE Technology. Its black mat facing gives the airstream a smooth, tough surface, that resists damage during installation and operation. Airstream surface mat facing is treated with an EPA-registered anti-microbial agent to aid in the prevention of fungal and bacterial growth. It offers an optimum combination of efficient sound absorption, low thermal conductivity and minimal air surface friction.

APPLICATION

- Interior insulation material for heating, ventilating and air conditioning plenums and sheet metal ducts

SPECIFICATION COMPLIANCE

U.S.

- ASTM C1071; Type II
- ASTM G21
- California Title 24
- NFPA 90A and 90B
- UL/ULC Classified

Canada

- CAN/ULC S102

INDOOR AIR QUALITY

- UL Environment
 - GREENGUARD Certified
 - GREENGUARD Gold Certified
 - Validated to be Formaldehyde-Free
- Does not contain polybrominated diphenyl ethers (PBDE) such as Penta-BDE, Octa-BDE, or Deca-BDE
- EUCEB Certified

CONTRACTOR: _____

JOB: _____


DATE: _____

DOING MORE FOR THE WORLD WE LIVE IN.

Knauf Insulation products with ECOSE® Technology are made using our patented, bio-based binder - a smarter alternative to the phenol/formaldehyde (PF) binder traditionally used in fiberglass products. The bio-based binder holds our product together, gives the product its unique appearance and makes it formaldehyde-free.

All of our products are made from sustainable resources, such as recycled glass and sand. And we're proud to be putting glass bottles back to work rather than into landfills. Our products are made with a minimum of 50% recycled glass—totaling an average of 26 million bottles each month.

with ECOSE®
TECHNOLOGY

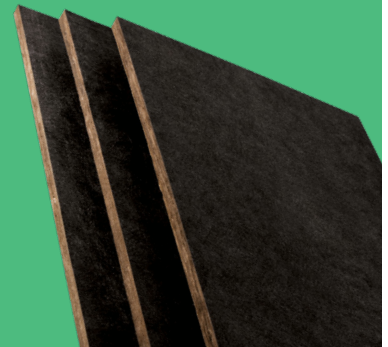

TECHNICAL DATA

Property (Unit)	Test	Performance
Corrosiveness	ASTM C665	Does not accelerate corrosion of steel
Corrosion	ASTM C1617	Pass
Air Velocity	ASTM C1071	Max. 5,000 ft./min. (25.4 m/sec.) Tested to 12,500 ft./min. (63.5 m/sec.)
Maximum Service Temperature	ASTM C411	250° F (121° C), Max. thickness 3"
Mold Growth	ASTM C1338, ASTM G21	Pass
Water Vapor Sorption (by weight)	ASTM C1104	3% or less
Surface Burning Characteristics (flame spread/smoke developed)	ASTM E84, CAN/ULC S102, UL 723	UL/ULC Classified FHC 25/50

FORMS AVAILABLE*


Thickness	Density	Width	Length
1"	3.0 PCF (48 kg/m ³)	24" (610 mm), 48" (1219 mm)	48" (1219 mm)
1½"			96" (2438mm)
2"			36" (914 mm)
			72" (1829 mm)
			96" (2438 mm)
			120" (3048 mm)

*Consult Price Book for minimum order quantities. Pallets available on made-to-order basis.

SOUND ABSORPTION COEFFICIENTS | ASTM C423, TYPE A MOUNTING

		Octave Band Center Frequency (cycles/sec.)						
Product		125	250	500	1000	2000	4000	NRC
3.0 PCF (48 kg/m ³)	1" (25 mm)	0.13	0.24	0.56	0.83	0.92	0.98	0.65
	1½" (38 mm)	0.19	0.41	0.89	1.02	1.03	1.04	0.85
	2" (51 mm)	0.33	0.67	1.07	1.07	1.03	1.06	0.95
4.25 PCF (68 kg/m ³)	1" (25 mm)	0.06	0.24	0.69	0.99	1.05	1.02	0.75

FRICITION LOSS | INCHES OF WATER PER 100'

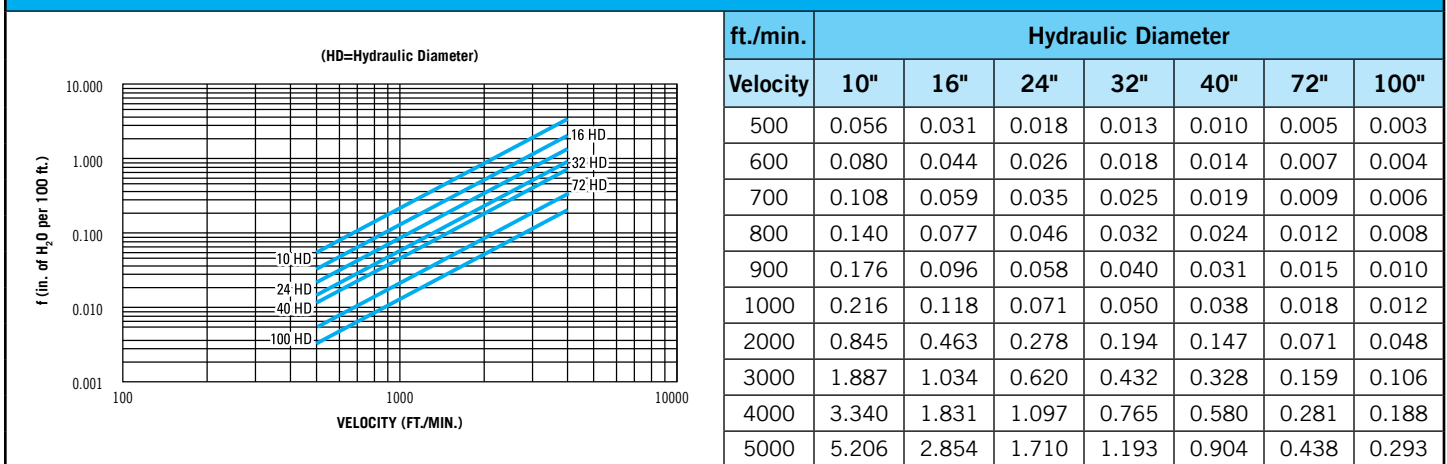

THERMAL CONDUCTIVITY "C"¹ AND RESISTANCE "R"² | ASTM C177


Mean Temperature 75° F (24° C)

Product		Conductance "C"	Resistance "R"
3.0 PCF (48 kg/m ³)	1" (25 mm)	0.23 (1.31)	4.3 (0.76)
	1½" (38 mm)	0.15 (0.85)	6.5 (1.15)
	2" (51 mm)	0.11 (0.62)	8.7 (1.53)
4.25 PCF (68 kg/m ³)	1" (25 mm)	0.225 (1.56)	4.4 (0.78)
	1½" (38 mm)	0.15 (0.85)	6.6 (1.16)
	2" (51 mm)	0.11 (0.62)	8.9 (1.56)

"C Units" $\frac{\text{BTU}}{\text{ft}^2 \cdot \text{hr} \cdot ^\circ\text{F}} \left(\frac{\text{W}}{\text{m}^2 \cdot ^\circ\text{C}} \right)$ "R Units" $\frac{\text{ft}^2 \cdot \text{hr} \cdot ^\circ\text{F}}{\text{BTU}} \left(\frac{\text{m}^2 \cdot ^\circ\text{C}}{\text{W}} \right)$

¹The lower the value, the better the performance. ²The higher the value, the better the performance.

MECHANICAL FASTENER LOCATION		
Velocity per ft./min. (m/sec.)	0-2500 (0-12.7)	2501-5000 (12.7-25.4)
A. From corners of duct	4" (102 mm)	4" (102 mm)
B. From transverse end of duct liner	3" (76 mm)	3" (76 mm)
C. Across width of duct, on centers (min. 1/side)	12" (305 mm)	12" (305 mm)
D. Across length of duct, on centers (min. 1/side)	18" (457 mm)	18" (457 mm)

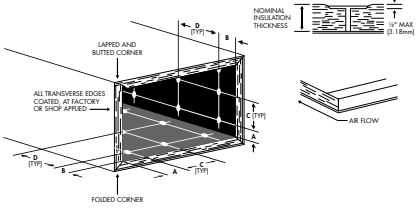

APPLICATION AND SPECIFICATION GUIDELINES

Storage

- Inside storage is recommended. Protect stored product from water damage or abuse. If stored outside, stack cartons on pallets and cover adequately to prevent moisture infiltration.

Fabrication and Application

- Install product in metal duct and plenums operating at 250° F (121° C) service temperature or less and velocities of 5,000 ft./min. (25.4 m/sec.) or less.
- Liner shall be applied with the treated surface facing toward the air stream.
- Mechanical fasteners shall not compress the liner more than 1/8" (3.2 mm) and shall be installed perpendicular to the airstream surface. All fasteners must meet "Standard for Mechanical Fasteners-MF-1-1975."
- Adhesives which conform to ASTM C916 shall be applied to the sheet metal with at least 90% coverage.
- All internal duct areas designated to be lined shall be completely covered with liner. Transverse joints shall be firmly butted together with no gaps, and coated with adhesive. All exposed leading edges shall be coated with adhesive.
- Mechanical fasteners shall be used to secure the Atmosphere Rigid Plenum Liner and spaced in accordance with the chart and diagram on the next page.

- Corner joints shall be overlapped so no gaps are present. Top pieces shall be supported by side pieces.
- All longitudinal joints shall be coated with adhesive conforming to ASTM C916 at velocities over 2,500 ft./min. (12.7 m/sec.).
- All damaged areas to the airstream surface shall be repaired with an adhesive that conforms to ASTM C916.

FIBERGLASS AND MOLD

Fiberglass insulation will not sustain mold growth. However, mold can grow on almost any material when it becomes wet and contaminated. Carefully inspect any insulation that has been exposed to water. If it shows any sign of mold it must be discarded. If the material is wet but shows no evidence of mold, it should be dried rapidly and thoroughly. If it shows signs of facing degradation from wetting, it should be replaced.

Air handling insulation used in the air stream must be discarded if exposed to water.

NOTES

When condensation is permitted to occur between nested Atmosphere Rigid Plenum Liner and galvanized steel panels, discoloration of the metal may occur.

CERTIFICATIONS



Check with your Knauf Insulation Territory Manager to ensure information is current.

The chemical and physical properties of this product represent average values determined in accordance with accepted test methods. The data is subject to normal manufacturing variations. The data is supplied as a technical service and is subject to change without notice. References to numerical flame spread ratings are not intended to reflect hazards presented by these or any other materials under actual fire conditions.

This product is covered by one or more U.S. and/or other patents. See patent www.knaufnorthamerica.com/patents

Visit knaufnorthamerica.com to learn more.

KNAUF INSULATION, INC.

One Knauf Drive
Shelbyville, IN 46176

Technical Support
(317) 398-4434 ext. 8727
info.us@knaufinsulation.com

01-20

© 2020 Knauf Insulation, Inc.